
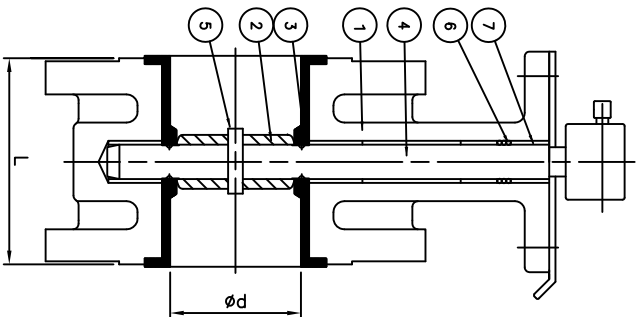
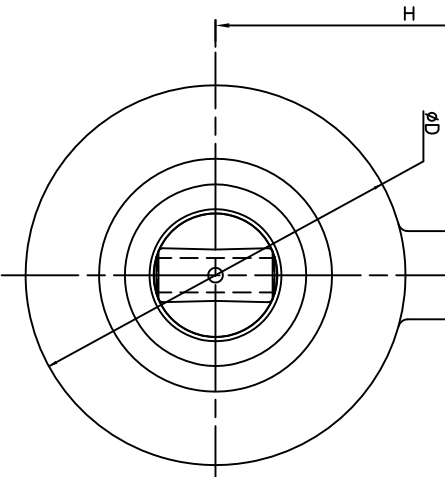
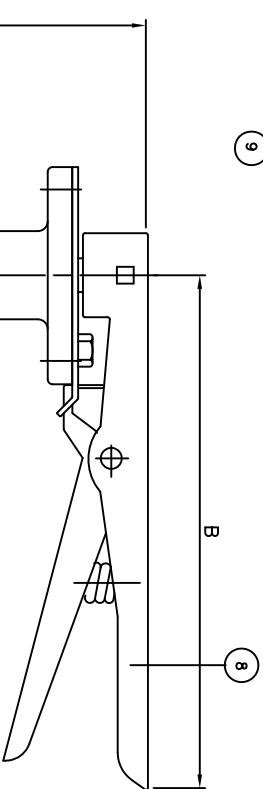


D I M E N S I O N S						UNIT: mm	
NOMINAL DIAMETER	ød	L	F L A N G E			H	B
			øD	øC	n-h		
65A	65	112	185			165	205
80A	80	114	200			165	205
100A	100	127	220			190	265
125A	125	140	250			205	265
150A	150	140	285			215	265
200A	200	152	340			250	350

FLANGE RATING : PN 16(UN-DRILLED)

P.NO.	PART NAME	MATERIAL	Q'TY	REMARK
1	BODY	FCD450	1	
2	DISC	A351CF8	1	
3	SEAT RING	EPDM	1	
4	STEM	SUS410	1	
5	DISC PIN	SUS304	1	5"~8" : 2
6	PACKING	EPDM	1SET	
7	BUSH	BRONZE	1SET	
8	LEVER	ASS'Y	1	
9	INDICATOR	SS400	1	

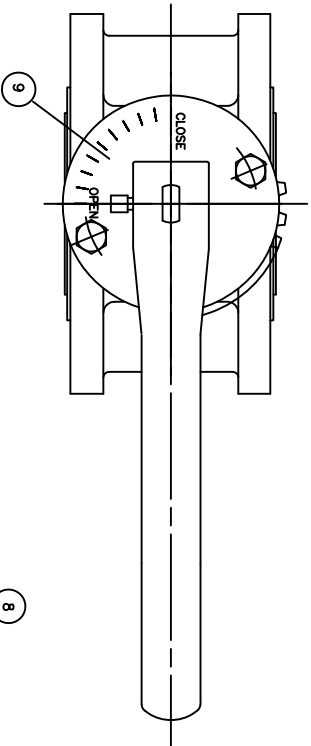

N O T E S

1. HYDROSTATIC TEST
-BODY : 15 BAR
-SEAT : 11 BAR
2. FACE TO FACE : ISO 5752 SERIES 13

NO.	DATE	DESCRIPTION	DRA.	DES.	CHK.	APP.
0	10.08.11	FIRST ISSUED				

DOUBLE FLANGE TYPE LEVER OPERATED BUTTERFLY VALVE						
TITLE	CHK.	DES.	DRA.	SCALE	DATE	
APP.					2010.08.11	
				DWG/N	CRB31-0210	

JAEYOU INDUSTRY CO.,LTD